

HWg-STE plus


Ethernet thermometer with Digital Inputs

Web thermometer with 2 Digital Inputs. You can connect two temperature or humidity sensors and 2 Dry Contacts.

Email alerts and SNMP interface are implemented. Can be used with the SensDesk.com online portal.

Windows software, AC power adapter and temperature sensor included

Simple installation, supports DHCP

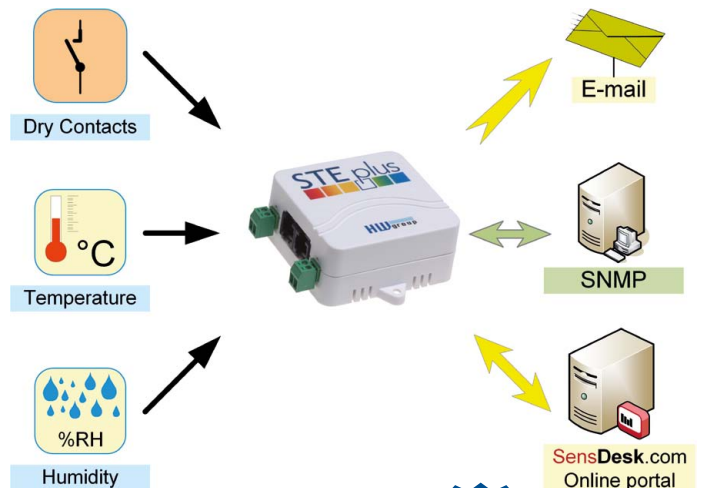

Applications

Monitor technology cabinets

Door opening, smoke detection or environmental issues alert.

Fridge monitoring

The HWg-STE plus sends an e-mail if the cooler fails or a door is opened for a long time.

Air-conditioning failure

Alerting if temperature is too high or in case of A/C unit failure.

Heating optimization

IP thermometer saves heating and air-conditioning costs.

Food storage


Monitor optimal storage conditions. HACCP reports can be created using application software.



- ✓ Temperature
- ✓ Humidity
- ✓ Dry Contact
- ✓ Email alerts
- ✓ Web server
- ✓ SNMP
- ✓ sensdesk.com compatible

Basic features

- Can be connected to online sensors portal www.SensDesk.com
- You can connect one more temperature or humidity sensor - in addition to included temperature sensor.
- You can easy connect detectors as door contact, smooke detector etc.
- Simple installation, supports DHCP.
- SNMP support (SNMP MIB included).
- 0.1 °C resolution, display in °C / °K or °F.
- Sends an e-mail if Dry Contact is triggered or the temperature is too high / too low.
- Security protected with a password.
- You can connect additional external outdoor sensor: -50°C to+ 125°C (-58°F to +257°F).

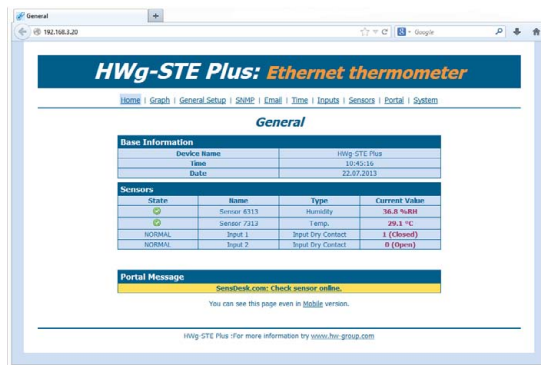

HWg-STE plus

Digital Inputs	2
Sensors (external probes)	max 2
Temperature	✓
Humidity	✓
SNMP	✓
Alarm alerts by e-mail	✓

Parameters

Ethernet	10/100 Mbit
IP protocols	ARP, TCP/IP (HTTP, SNMP) UDP/ IP (SNMP)
DHCP for IP assignment:	✓
SNMP	Port 161 Ver 1.0 /2.0 (in part)
M2M protocols	SNMP, XML , HWg-Push
Included probe 3m:	-10°C to +80°C +14°F to +176°F
Operating conditions	-10°C to +60°C +14°C to +140°F
Power	5V / 1W
Dimensions	105 x 105 x 25 [mm]

Accessories & related products



Temp-1Wire-Outdoor 3m	Smoke detector	Temp-1Wire-Flat 3m	HTemp-1Wire Rack 19
HWg-STE plus	Ethernet thermometer with two Digital Inputs, temperature sensor, power adapter, CD.		
HWg-STE	Web thermometer package, includes a single temperature sensor, power adapter and CD		
Temp-1Wire IP67 1m / 3m / 10m	Stainless-steel outdoor temperature sensor (-10°C to 80°C), 1m/3m/10m cable, IP67		
Temp-1Wire-Outdoor 3m	Stainless-steel outdoor temperature sensor (-50°C to 125°C), 3m cable		
Temp-1 Wire-Flat 3m	Stainless-steel temperature sensor for freezers (-30°C to 60°C), 3m flat cable		
Humid-1 Wire 1m / 3m / 10m	Humidity probe with 1m / 3m / 10m cable		
Temp-Rack19	Temperature sensor, 1U device to a RACK, daisy-chainable, 3m cable		
HTemp-1Wire Outdoor 3m	Temperature & Humidity outdoor sensor (-30 to +85°C, 0 to 100% RH). 3 m cable.		